



■ DURABLE

- Bolted, robust metal construction
- Aluminum and 316 SS options
- 3 mm solids handling

■ COMPACT

- 4.9 kg aluminum body
- Max. flow 57 L/min
- 1/4" air inlet


■ VERSATILE

- 3/4" fluid connection
- Wide elastomer selection
- Max. suction lift 6-7 m


Accessories

- Filter-regulator assembly
- Pulsation dampener
- Air shut-off valve
- Replacement diaphragm and ball kits

Installation / Dimensions

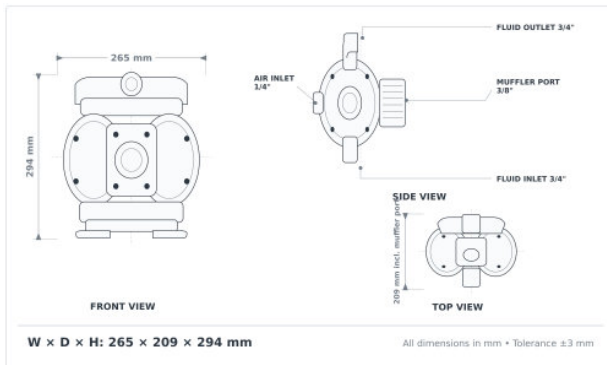

Performance Curve

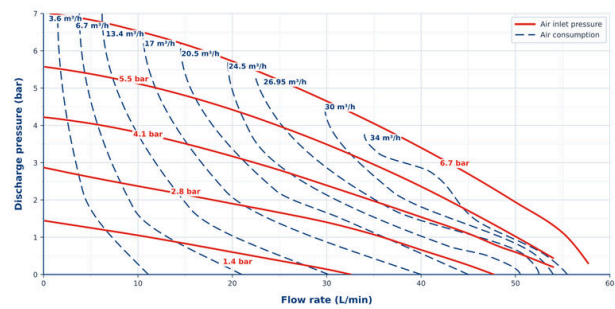

Technical Data		AL • SS 316
Technical Specification	ZEROVAC Z05	
Model	ZEROVAC Z05	
Maximum flow	57 L/min	
Maximum air pressure	8.4 bar	
Maximum discharge head	80 m	
Maximum suction lift	6-7 m	
Air consumption	3.6-34 m³/h	
Fluid inlet / outlet	3/4"	
Air inlet	1/4"	
Wetted material options	Aluminum / Stainless Steel (316)	
Elastomer options	Santoprene, Neoprene, Buna-N, EPDM, FKM, PTFE	
Maximum particle size	3 mm	
Fluid temperature	-18 ... +100 °C	
Aluminum body weight	4.9 kg	
Overall dimensions (W x D x H)	265 x 209 x 294 mm	
Overall depth	209 mm (including muffler port)	
Dimensional tolerance	±3 mm	

Note: The performance curve is based on water at ambient temperature. Dimensions are in mm. Product selection must be based on fluid properties and operating conditions.

FOR MORE INFORMATION

For technical support, product selection or a tailored quotation, please contact our sales team.

info@zerovakum.com.tr
 +90 212 656 29 08
 www.zerovakum.com.tr