



■ **HYGIENIC**

- Polished stainless steel flow path
- Clamp fittings for quick disassembly
- Cleanable product-contact surfaces

■ **POWERFUL**

- Maximum flow 160 L/min
- Maximum air pressure 7 bar
- Maximum discharge head 70 m


■ **VERSATILE**

- 1" hygienic fluid connection
- 1/2" air inlet
- Application-specific diaphragm selection


Accessories

- Filter-regulator assembly
- Pulsation dampener
- Air shut-off valve
- Replacement diaphragm and ball kits

Installation / Dimensions

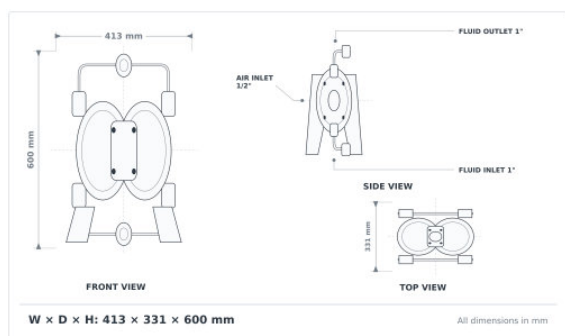

Performance Curve

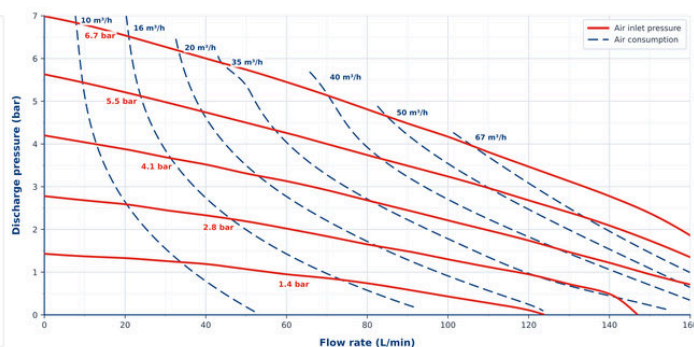

	Technical Data	STAINLESS STEEL
Technical Specification	ZEROVAC Z10	
Model	ZEROVAC Z10	
Maximum flow	160 L/min	
Maximum air pressure	7 bar	
Maximum discharge head	70 m	
Maximum suction lift	6-7 m	
Air consumption	10-67 m³/h	
Fluid inlet / outlet	1"	
Air inlet	1/2"	
Wetted material	Hygienic stainless steel	
Diaphragm / elastomer	Selected according to the application	
Maximum particle size	4 mm	
Fluid temperature	According to diaphragm and elastomer selection	
Overall dimensions (W x D x H)	413 x 331 x 600 mm	
Overall depth	331 mm	
Drawing status	Reference dimensions only	

Note: The performance curve is based on water measurements at ambient temperature. Installation dimensions are in millimetres. Product selection must be based on fluid properties and operating conditions.

FOR MORE INFORMATION

For technical support, product selection or a tailored quotation, please contact our sales team.

info@zerovakum.com.tr
 +90 212 656 29 08
 www.zerovakum.com.tr