



■ **DURABLE**

Bolted, robust body construction
PP / PVDF wetted material options
4 mm solids handling

■ **COMPACT**

6.91 kg PP body
Maximum flow 160 L/min
1/2" air inlet


■ **VERSATILE**

1" fluid connection
Wide elastomer selection
Maximum suction lift 6-7 m


Accessories

- Filter-regulator assembly
- Pulsation dampener
- Air shut-off valve
- Replacement diaphragm and ball kits

Installation / Dimensions

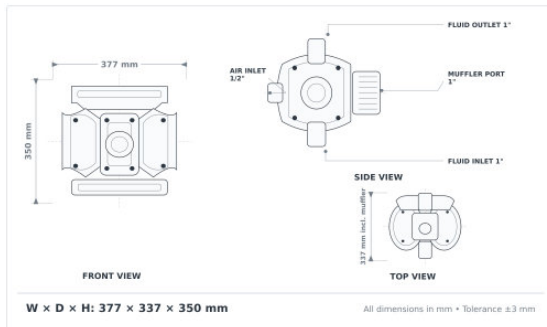

Performance Curve

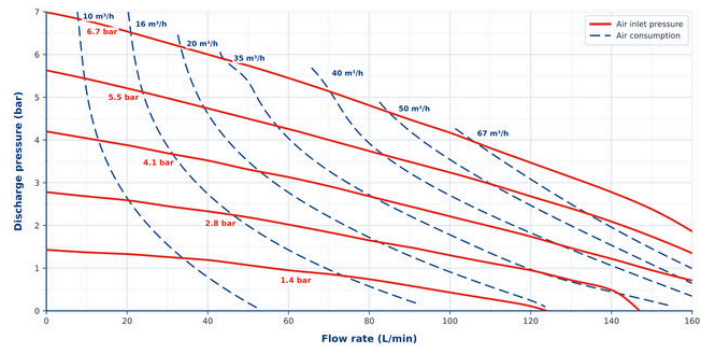

Technical Data		PP • PVDF
Technical Specification	ZEROVAC Z10B	
Model	ZEROVAC Z10B	
Maximum flow	160 L/min	
Maximum air pressure	7 bar	
Maximum discharge head	70 m	
Maximum suction lift	6-7 m	
Air consumption	10-67 m³/h	
Fluid inlet / outlet	1"	
Air inlet	1/2"	
Wetted material options	PP / PVDF	
Elastomer options	Santoprene, Neoprene, Buna-N, EPDM, FKM, PTFE	
Maximum particle size	4 mm	
Fluid temperature	-18 ... +100 °C	
Overall dimensions (W x D x H)	377 x 337 x 350 mm	
Overall depth	337 mm (including muffler)	
Dimensional tolerance	±3 mm	

Note: The performance curve is based on water at ambient temperature. Dimensional tolerance is ±3 mm. Product selection must be based on fluid properties and operating conditions.

FOR MORE INFORMATION

For technical support, product selection or a tailored quotation, please contact our sales team.

info@zerovakum.com.tr
 +90 212 656 29 08
 www.zerovakum.com.tr