

ZEROVAC ZRV 220H26

Two-Stage Blower



■ RELIABLE

- Effective air cooling and long service life
- Nearly maintenance-free, dry and contact-free operation
- Protection against overheating

■ FLEXIBLE

- Robust and lightweight construction
- High pressure and vacuum
- Horizontal and vertical installation

■ QUIET

- Low noise level
- No vibration thanks to precision balancing
- Integrated silencers as standard

Accessories


- Vacuum relief valves
- Additional silencers
- Pressure relief valves
- Inlet filter for vacuum or pressure operation

ZEROVAC ZRV 220H26


Two-Stage Blower




Vacuum Performance Curve

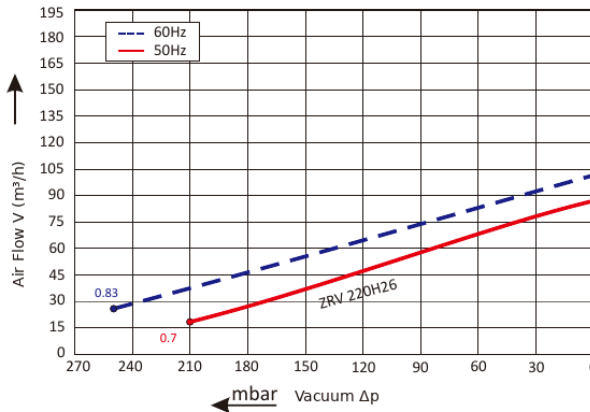

Pressure Performance Curve

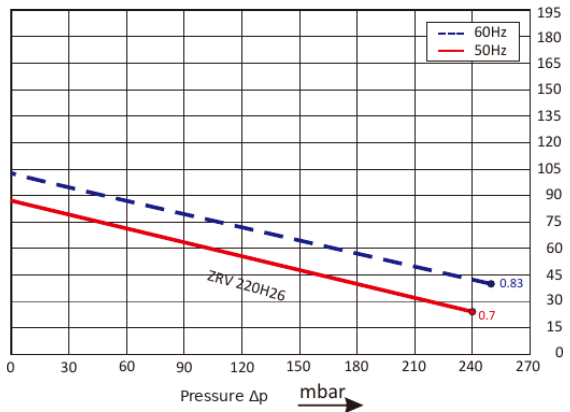

Installation Drawing

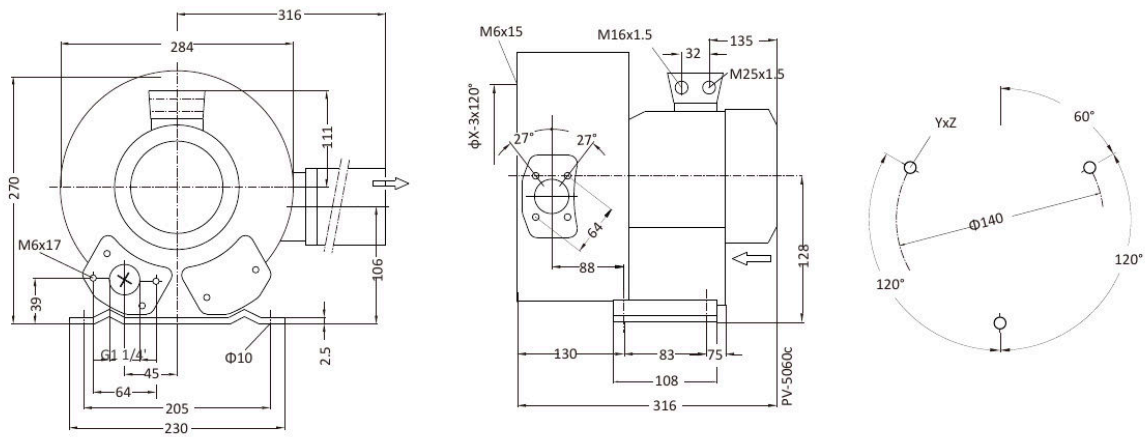

Technical Data

3 Phase • IP54 • Class F

Model	Hz	kW	Voltage (V)	Current (A)	Air Flow (m³/h)	Vacuum (mbar)	Pressure (mbar)	Noise dB(A)	kg
ZRV 220H26	50	0.7	200-240 /345-415Y	3.8 /2.2Y	88	-210	240	55	14
ZRV 220H26	60	0.83	220-275 /380-480Y	3.75 /2.15Y	103	-250	250	61	14

Note: Performance curves are based on measurements taken with air at 15°C and an atmospheric pressure of 1013 mbar. The total pressure differentials apply at inlet and ambient temperatures up to 25°C.

NEED MORE INFORMATION?

Contact our sales team for technical assistance, product selection, or a customized quotation.

info@zerovakum.com.tr
 [+90 212 656 29 08](tel:+902126562908)
 www.zerovakum.com.tr