

ZEROVAC ZRV 410A21

Single-Stage Blower



■ RELIABLE

- Effective air cooling and long service life
- Nearly maintenance-free, dry and contact-free operation
- Protection against overheating

■ FLEXIBLE

- Robust and lightweight construction
- High pressure and vacuum
- Horizontal and vertical installation

■ QUIET


- Low noise level
- No vibration thanks to precision balancing
- Integrated silencers as standard

Accessories


- Vacuum relief valves
- Pressure relief valves
- Additional silencers
- Inlet filter for vacuum or pressure operation

ZEROVAC ZRV 410A21

Single-Stage Blower

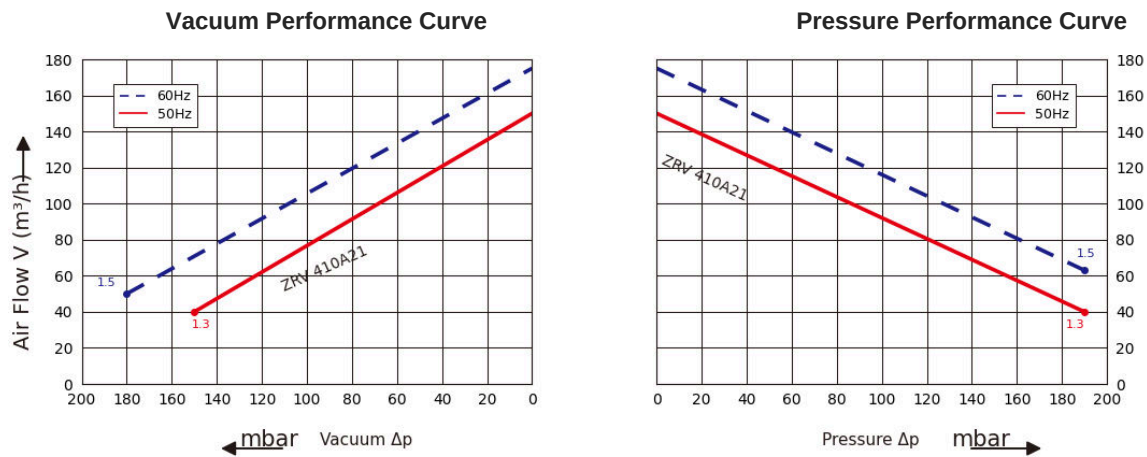

Installation Drawing

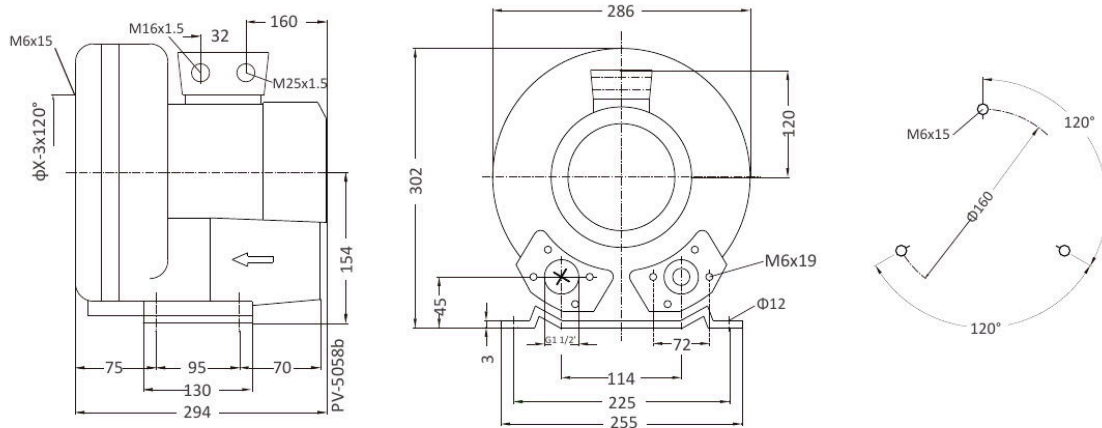

Technical Data							1 Phase • IP54 • Class F		
Model	Hz	kW	Voltage (V)	Current (A)	Air Flow (m³/h)	Vacuum (mbar)	Pressure (mbar)	Noise dB(A)	kg
ZRV 410A21	50	1.3	200-240	7.3	145	-150	190	63	16
ZRV 410A21	60	1.5	220-275	8.3	175	-180	190	64	16

Note: Performance curves are based on measurements taken with air at 15°C and an atmospheric pressure of 1013 mbar. The total pressure differentials apply at inlet and ambient temperatures up to 25°C.

NEED MORE INFORMATION?

Contact our sales team for technical assistance, product selection, or a customized quotation.

info@zerovakum.com.tr

[+90 212 656 29 08](tel:+902126562908)

www.zerovakum.com.tr

www.zerovakum.com.tr

© 2026 ZEROVAC Vacuum Systems 2