


ZEROVAC ZRV 410T16

Single-Stage Blower

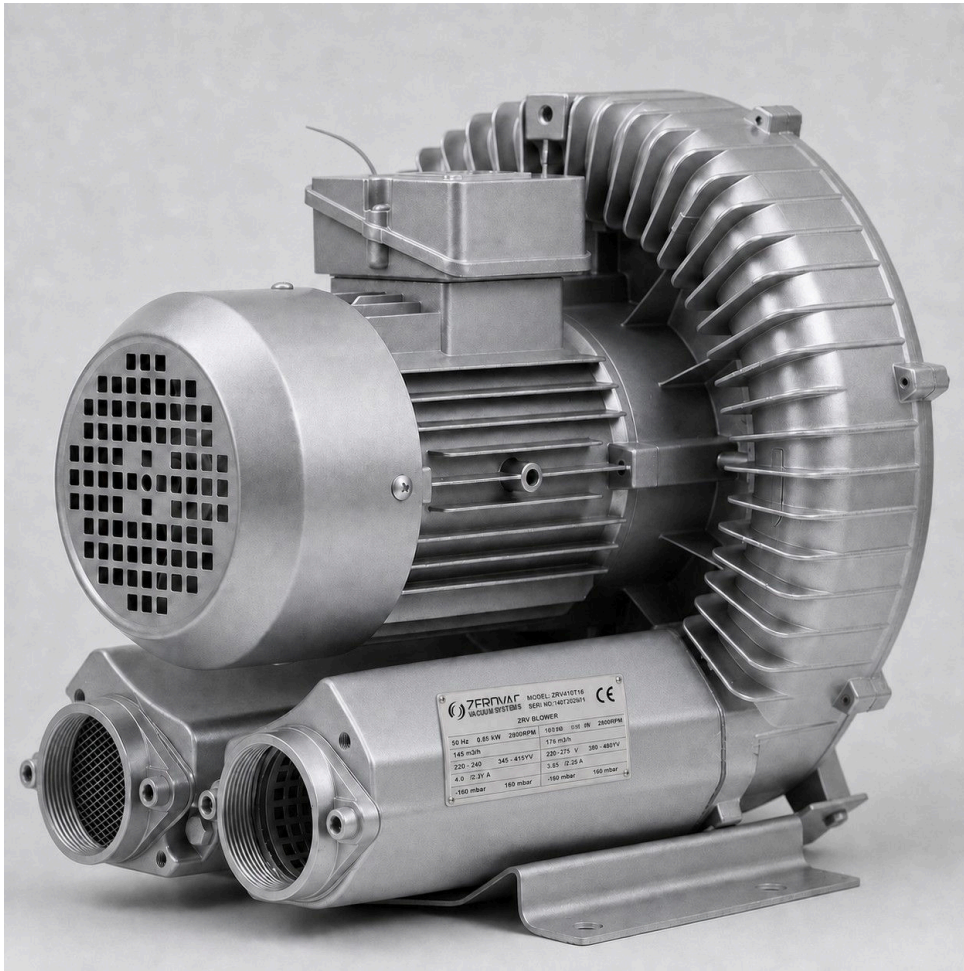

■ RELIABLE

- Effective air cooling and long service life
- Nearly maintenance-free, dry and contact-free operation
- Protection against overheating

■ FLEXIBLE

- Robust and lightweight construction
- High pressure and vacuum
- Horizontal and vertical installation

■ QUIET

- Low noise level
- No vibration thanks to precision balancing
- Integrated silencers as standard

Accessories


- Vacuum relief valves
- Pressure relief valves
- Additional silencers
- Inlet filter for vacuum or pressure operation

ZEROVAC ZRV 410T16


Single-Stage Blower




Vacuum Performance Curve

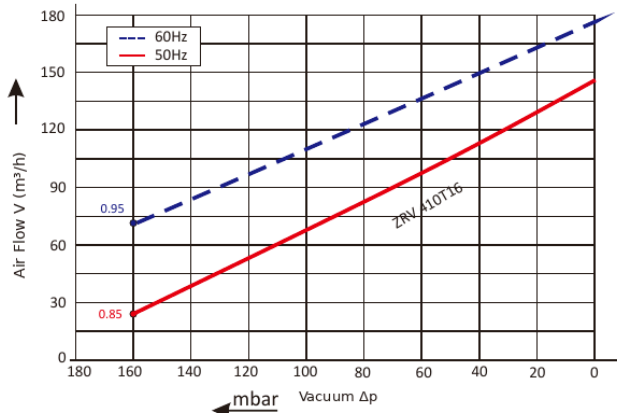

Pressure Performance Curve

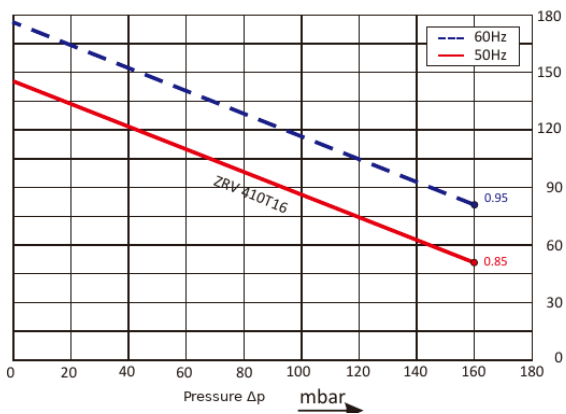

Installation Drawing

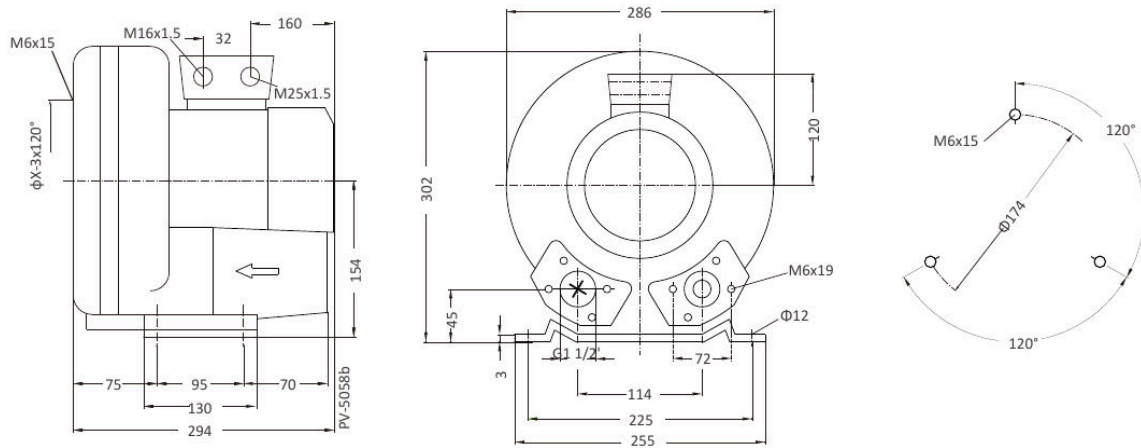

Technical Data

3 Phase • IP54 • Class F

Model	Hz	kW	Voltage (V)	Current (A)	Air Flow (m³/h)	Vacuum (mbar)	Pressure (mbar)	Noise dB(A)	kg
ZRV 410T16	50	0.85	200-240 Δ / 345-415Y	4.2 Δ / 2.4Y	145	-160	160	63	15
ZRV 410T16	60	0.95	220-275 Δ / 380-480Y	4.0 Δ / 2.3Y	175	-160	160	64	15

Note: Performance curves are based on measurements taken with air at 15°C and an atmospheric pressure of 1013 mbar. The total pressure differentials apply at inlet and ambient temperatures up to 25°C.



NEED MORE INFORMATION?

Contact our sales team for technical assistance, product selection, or a customized quotation.



info@zerovakum.com.tr



+90 212 656 29 08



www.zerovakum.com.tr