

ZEROVAC ZRV 510T36

Single-Stage Blower



■ RELIABLE

- Effective air cooling and long service life
- Nearly maintenance-free, dry and contact-free operation
- Protection against overheating

■ FLEXIBLE

- Robust and lightweight construction
- High pressure and vacuum
- Horizontal and vertical installation

■ QUIET

- Low noise level
- No vibration thanks to precision balancing
- Integrated silencers as standard

Accessories


- Vacuum relief valves
- Pressure relief valves
- Additional silencers
- Inlet filter for vacuum or pressure operation

ZEROVAC ZRV 510T36


Single-Stage Blower




Vacuum Performance Curve

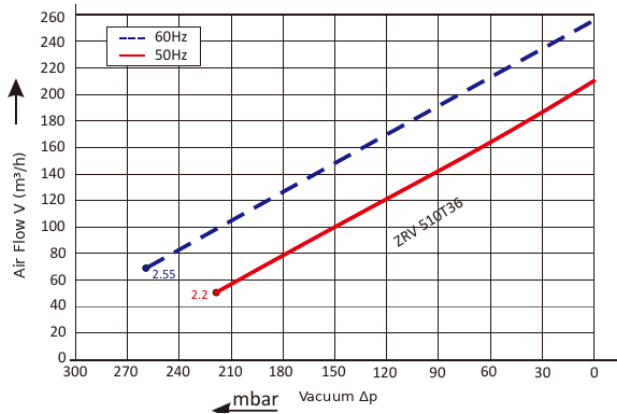

Pressure Performance Curve

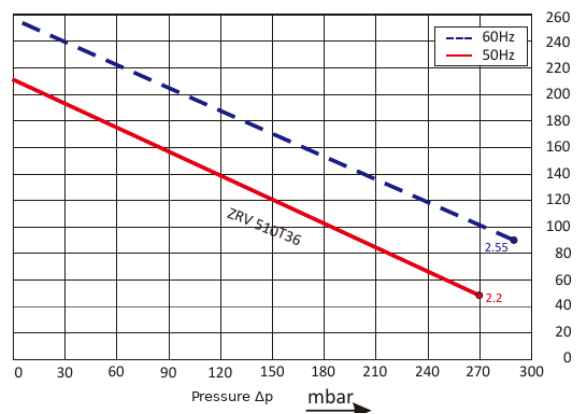

Installation Drawing

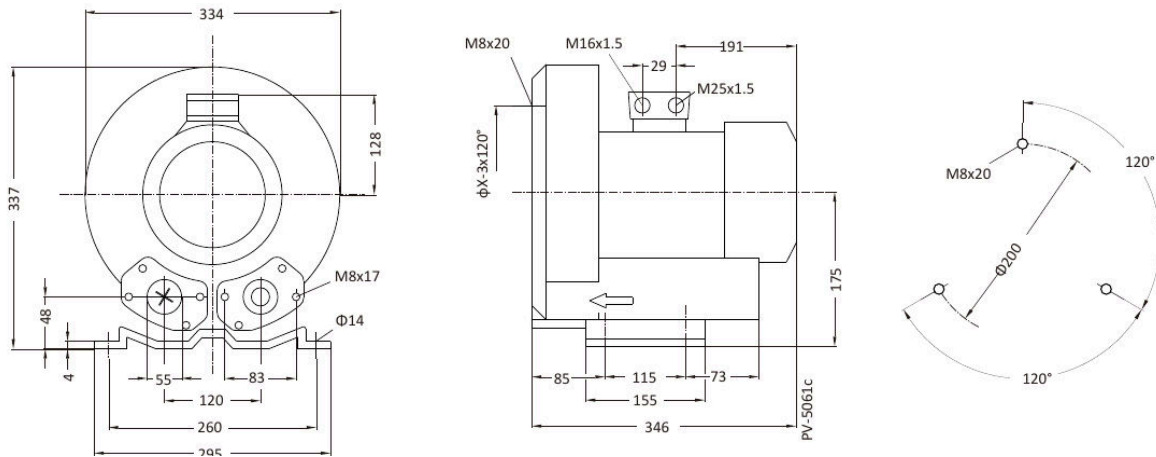

Technical Data

3 Phase • IP54 • Class F

Model	Hz	kW	Voltage (V)	Current (A)	Air Flow (m³/h)	Vacuum (mbar)	Pressure (mbar)	Noise dB(A)	kg
ZRV 510T36	50	2.2	200-240 Δ / 345-415Y	9.7 Δ / 5.6Y	210	-220	270	64	25
ZRV 510T36	60	2.55	220-275 Δ / 380-480Y	10.3 Δ / 6.0Y	255	-260	290	70	25

Note: Performance curves are based on measurements taken with air at 15°C and an atmospheric pressure of 1013 mbar. The total pressure differentials apply at inlet and ambient temperatures up to 25°C.



NEED MORE INFORMATION?

Contact our sales team for technical assistance, product selection, or a customized quotation.



info@zerovakum.com.tr



+90 212 656 29 08



www.zerovakum.com.tr