

ZEROVAC ZRV 910T17

Single-Stage Blower



■ RELIABLE

- Effective air cooling and long service life
- Nearly maintenance-free, dry and contact-free operation
- Protection against overheating

■ FLEXIBLE

- Robust and lightweight construction
- High pressure and vacuum
- Horizontal and vertical installation

■ QUIET

- Low noise level
- No vibration thanks to precision balancing
- Integrated silencers as standard


Accessories

- Vacuum relief valves
- Pressure relief valves
- Additional silencers
- Inlet filter for vacuum or pressure operation


Single-Stage Blower




Vacuum Performance Curve

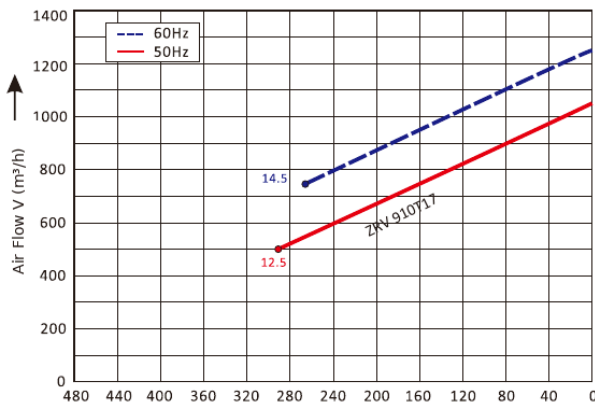

Pressure Performance Curve

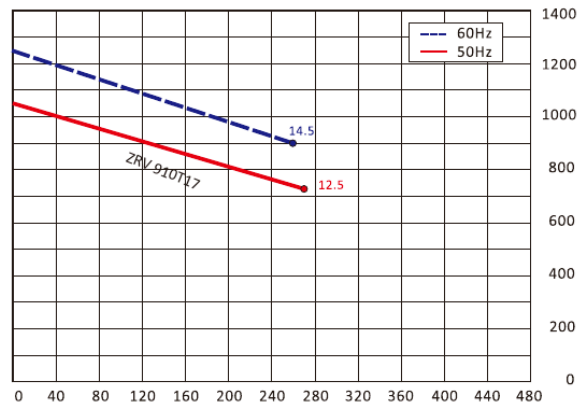

Installation Drawing

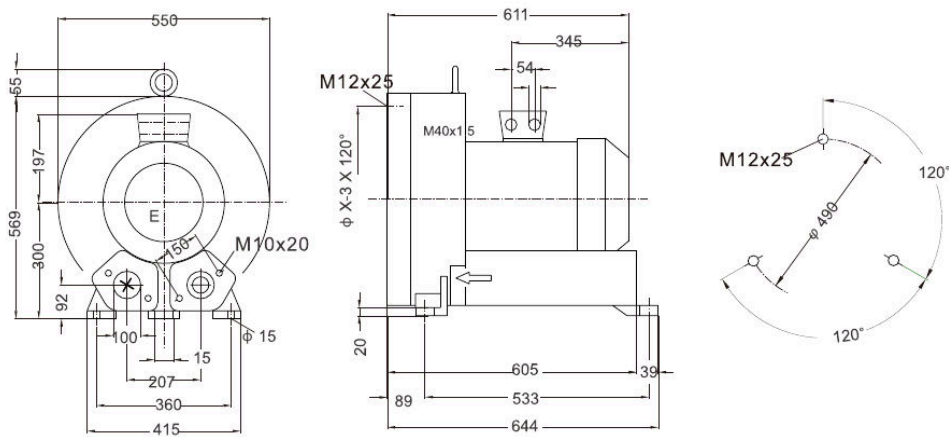

			Technical Data				3 Phase • IP55 • Class H		
Model	Hz	kW	Voltage (V)	Current (A)	Air Flow (m³/h)	Vacuum (mbar)	Pressure (mbar)	Noise dB(A)	kg
ZRV 910T17	50	12.5	345-415 Δ / 600-690Y	28.0 Δ / 16.2Y	1050	-290	280	74	116
ZRV 910T17	60	14.5	380-480 Δ / 660-720Y	29.0 Δ / 16.7Y	1250	-270	260	79	116

Note: Performance curves are based on measurements taken with air at 15°C and an atmospheric pressure of 1013 mbar. The total pressure differentials apply at inlet and ambient temperatures up to 25°C.



NEED MORE INFORMATION?

Contact our sales team for technical assistance, product selection, or a customized quotation.



info@zerovakum.com.tr



+90 212 656 29 08



www.zerovakum.com.tr