


ZEROVAC ZRV 920H27

Two-Stage Blower

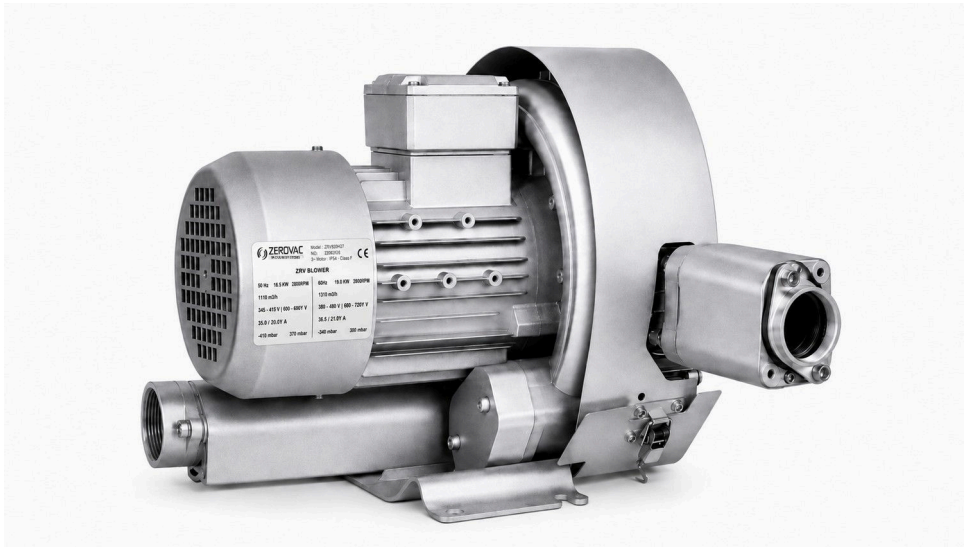

■ RELIABLE

- Effective air cooling and long service life
- Nearly maintenance-free, dry and contact-free operation
- Protection against overheating

■ FLEXIBLE

- Robust and lightweight construction
- High pressure and vacuum
- Horizontal and vertical installation

■ QUIET

- Low noise level
- No vibration thanks to precision balancing
- Integrated silencers as standard

Accessories


- Vacuum relief valves
- Additional silencers
- Pressure relief valves
- Inlet filter for vacuum or pressure operation

ZEROVAC ZRV 920H27


Two-Stage Blower




Vacuum Performance Curve

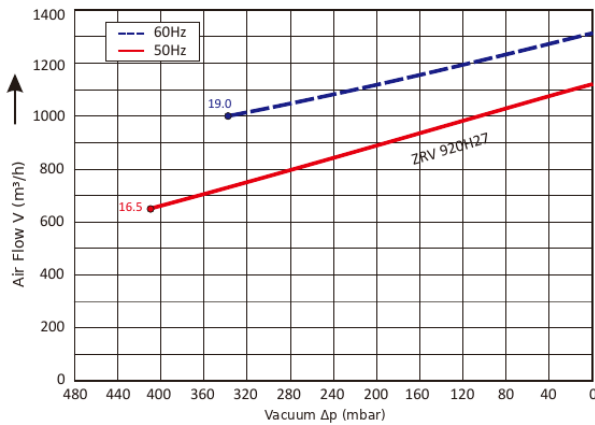

Pressure Performance Curve

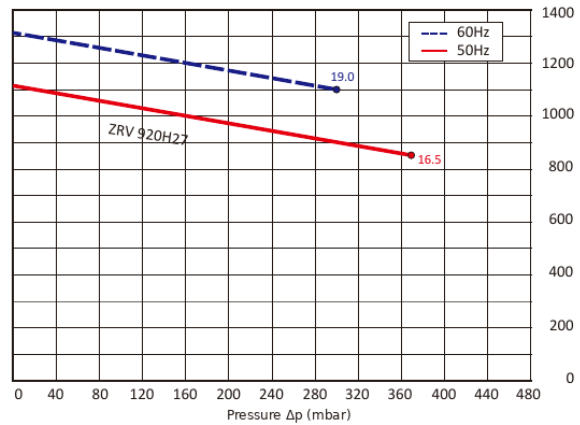

Installation Drawing

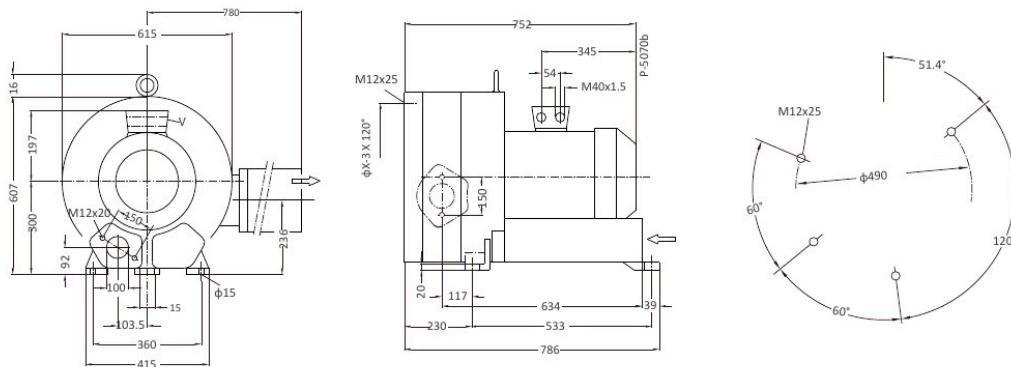

Technical Data							3 Phase • IP54 • Class F		
Model	Hz	kW	Voltage (V)	Current (A)	Air Flow (m³/h)	Vacuum (mbar)	Pressure (mbar)	Noise dB(A)	kg
ZRV 920H27	50	16.5	345-415 / 600-690Y	35.0 / 20.0Y	1110	-410	370	74	197
ZRV 920H27	60	19.0	380-480 / 660-720Y	36.5 / 21.0Y	1310	-340	300	84	197

Note: Performance curves are based on measurements taken with air at 15°C and an atmospheric pressure of 1013 mbar. The total pressure differentials apply at inlet and ambient temperatures up to 25°C.

NEED MORE INFORMATION?

Contact our sales team for technical assistance, product selection, or a customized quotation.

info@zerovakum.com.tr
 +90 212 656 29 08
 www.zerovakum.com.tr