


# ZEROVAC ZRV 720H57

Two-Stage Blower

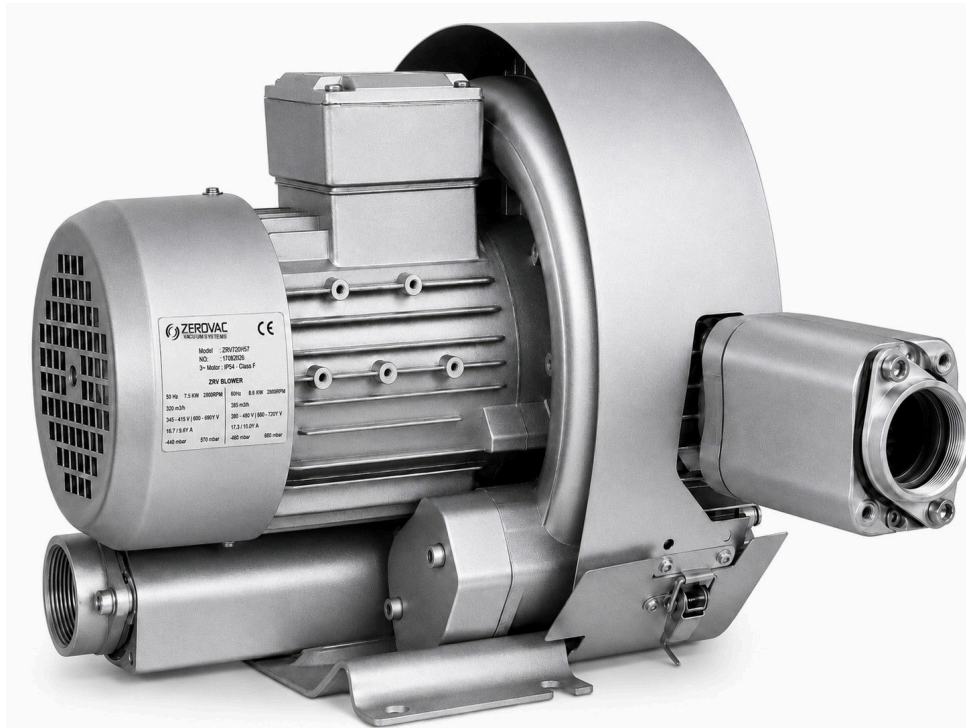

## ■ RELIABLE

- Effective air cooling and long service life
- Nearly maintenance-free, dry and contact-free operation
- Protection against overheating

## ■ FLEXIBLE

- Robust and lightweight construction
- High pressure and vacuum
- Horizontal and vertical installation

## ■ QUIET

- Low noise level
- No vibration thanks to precision balancing
- Integrated silencers as standard

## Accessories


- Vacuum relief valves
- Pressure relief valves
- Additional silencers
- Inlet filter for vacuum or pressure operation

# ZEROVAC ZRV 720H57


Two-Stage Blower




Vacuum Performance Curve

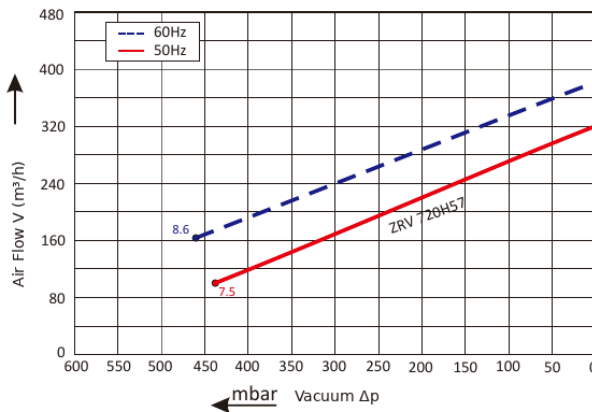

Pressure Performance Curve

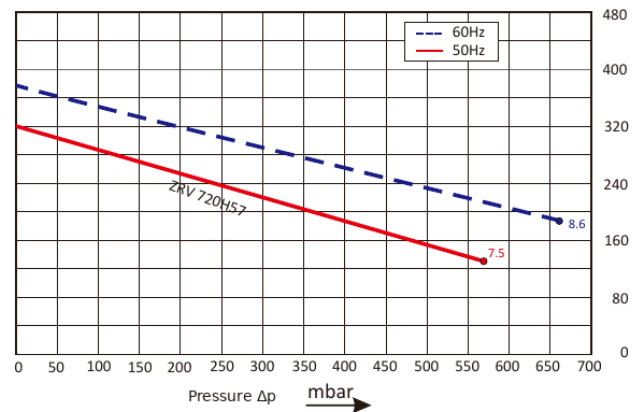

Installation Drawing

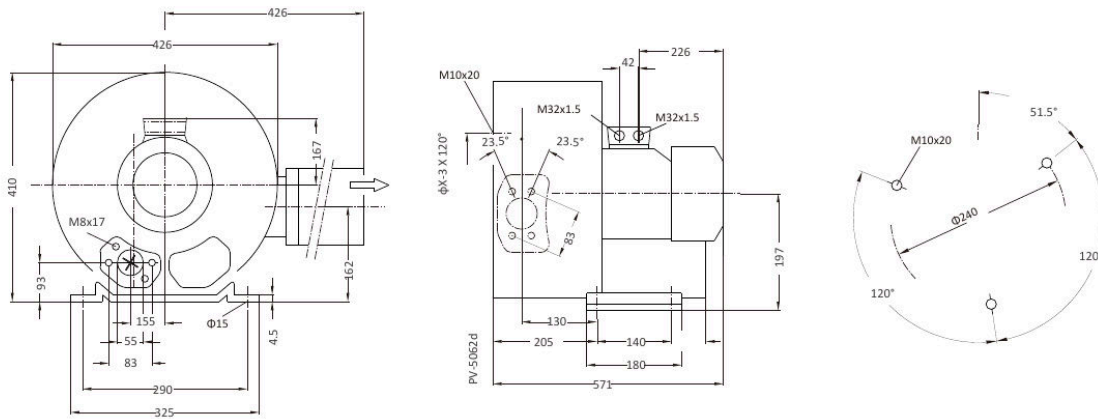

Technical Data

3 Phase • IP54 • Class F

| Model      | Hz | kW  | Voltage (V)       | Current (A) | Air Flow (m³/h) | Vacuum (mbar) | Pressure (mbar) | Noise dB(A) | kg |
|------------|----|-----|-------------------|-------------|-----------------|---------------|-----------------|-------------|----|
| ZRV 720H57 | 50 | 7.5 | 345-415 /600-690Y | 16.7 /9.6Y  | 320             | -440          | 570             | 73          | 77 |
| ZRV 720H57 | 60 | 8.6 | 380-480 /660-720Y | 17.3 /10.0Y | 385             | -460          | 660             | 76          | 77 |

Note: Performance curves are based on measurements taken with air at 15°C and an atmospheric pressure of 1013 mbar. The total pressure differentials apply at inlet and ambient temperatures up to 25°C.

## NEED MORE INFORMATION?

Contact our sales team for technical assistance, product selection, or a customized quotation.

info@zerovakum.com.tr
 +90 212 656 29 08
 www.zerovakum.com.tr